



TopHusk™
Huller and
Husk Separator.
AVHE/DRSD

TopHusk™

• **Powerful** • **Reliable** • **Compact** • **Modern**




Designed to be powerful and reliable - TopHusk™, the new compact huller and hull separator from Buhler is a perfect fit in your modern rice mill. TopHusk™ is well equipped to give your milling process a head start.

Application

The TopHusk™ hulls paddy rice with highest care and efficiency.

- High head rice yield
- High hulling degree
- High capacity
- Accurate husk separation
- Consistent outlet product quality
- Easy maintenance

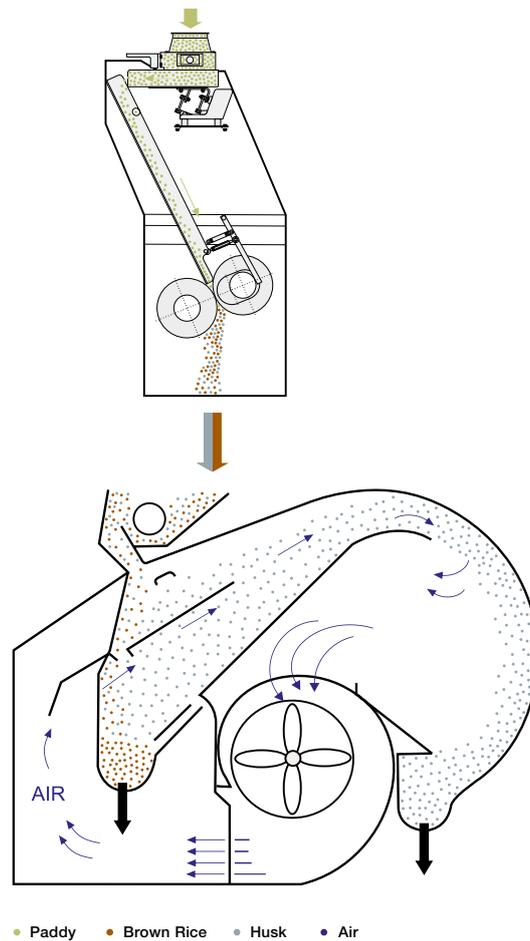

Function

A feed point connected to a chute with a vibro feeder guides each grain at optimal speed accurately between the rubber rolls. The huller adjusts its pressure appropriately to adapt to different types of paddy. The aspiration air blows around the rolls for intensive cooling.

The generously sized husk separator works with optimized flow of grains in a closed air circuit to separate the husk from the brown rice accurately. This modern technology finally generates two clean fractions.

Accurate husk separation

This design eliminates a cumbersome third fraction and achieves accurate husk separation. The process can be easily inspected through the large sight windows and adjusted accurately with the ergonomic levers.



TopHusk™

Give your milling process a head start.



Powerful - Constant high hulling action

- Accurate setting of high hulling degree ensures perfect and constant hulling in high capacity
- In spite of wear on rubber rollers with corresponding change in ratio, hulling degree remains constant, thus ensuring high head rice yield
- Automatic hulling pressure control maintains constant hulling degree even under changing roller temperature. This results in steady constant power consumption and longer roller life.



Reliable - High operating performance

- Vibro feeder helps in precise feeding without choking
- Product pre-acceleration via chute assures minimum breakage at high capacity
- Automatic feed point control compensates for the roll wear
- Paddle plates made of high wear-resistant steel
- Consistent product quality



Compact - Sturdy and Streamline design

- Motor position at the centre of the swivel arm
- Even product distribution across separating zone
- Compact hull separator unit with closed circuit airflow
- Connection to efficient aspiration system
- Extra wide machine housing of separator for low specific load of air stream
- Minimum breakage at high capacity
- Longer chute length to improve the feeding




Modern - Easy to operate and maintain

- High-performance Hybrid belt as a standard fitment to provide long service life
- User friendly touch pad to control feed rate, hulling degree and manual discharge of vibro feeder
- Automatic disengaging at product flow interruptions
- Control system with display that shows status and error messages

TopHusk™

Technical data.

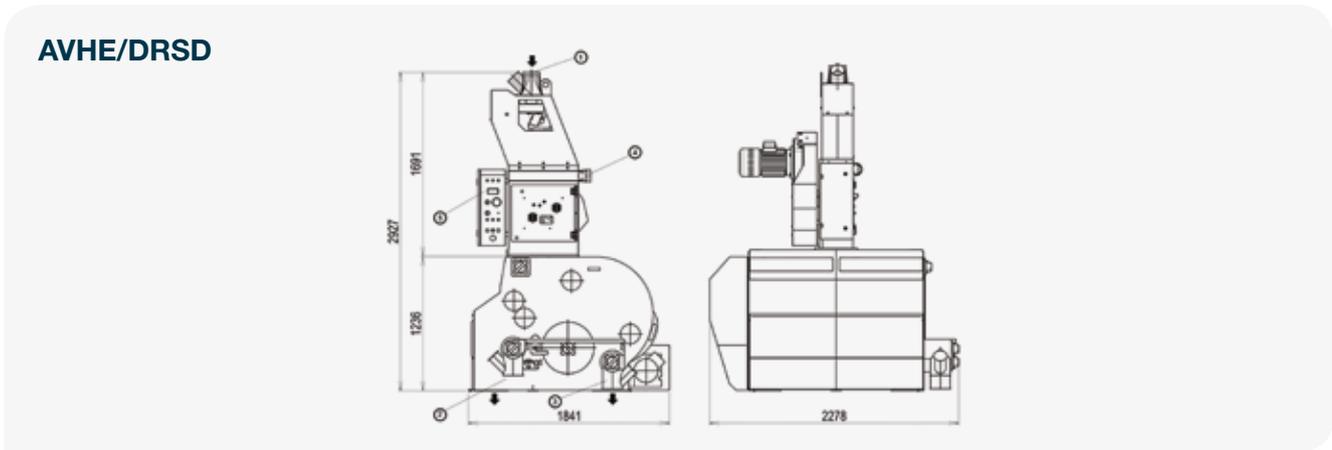

Dimensions, air and power requirements

AVHE/DRSD

Capacity rice input (t/h)	3.5-7
Motor (kW)	7.5/4.00
Air volume (m ³ /min)	7/-
Approx. weight kg - Unpacked	650/960
Approx. weight kg - Rail worthy packing	720/1160
Approx. weight kg - Sea worthy packing	790/1260
Volume m ³ packing	3/7
Package size (L x W x H)	1380 x 1220 x 1890/2480 x 2040 x 1340

*Depending on the type of product and finished product quality

**Capacity as plant paddy input

Bühler Southeast Asia and Oceania

Regional office:

Bühler Asia Pte. Ltd.

73 Bukit Timah Rd,

#04-01 Rex House, Singapore 229832

Telephone

Australia:	+61 3 9872 7900
Bangladesh:	+880 2 8878066
Cambodia:	+855 23 985 282
Indonesia:	+62 21 2977 9392
Malaysia:	+60 3 5870 2038
Myanmar:	+95 9 954 947555
Philippines:	+63 2 844 7500
Singapore:	+65 6826 6900
Taiwan:	+886 3 550 7373
Thailand:	+66 2 712 2600-1
Vietnam:	+84 272 3769 045

Email

southeast.asia@buhlergroup.com

buhlergroup.com

RS_Digital_BSEA_10.2019

